




Quarry Tile Quarry


or Equal




Field Tile

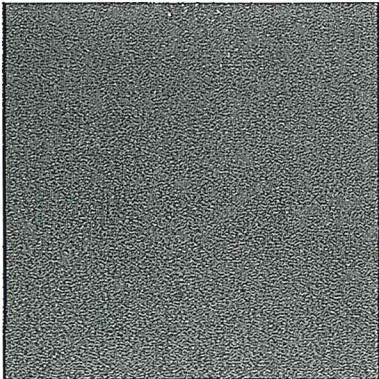


RED BLAZE (1) 0Q40
Field Tile
Pre-Consumer: 26.4%
Post-Consumer: 0.0%
Manufacturing Plant: Lewisport, KY

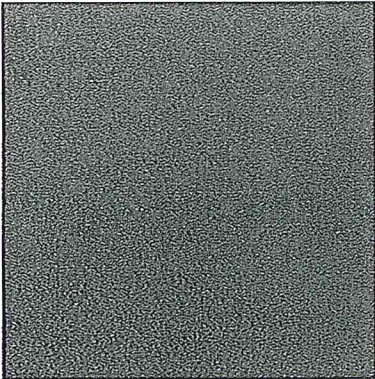

BLAZE FLASH (2) 0Q41
Field Tile
Pre-Consumer: 26.4%
Post-Consumer: 0.0%
Manufacturing Plant: Lewisport, KY

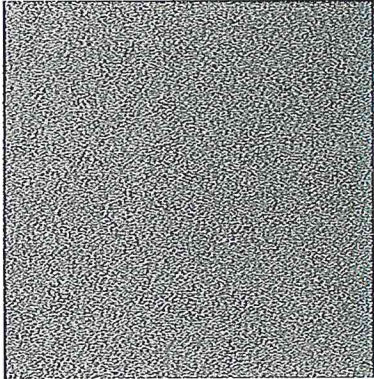

ARID GRAY (2) 0Q42
Field Tile
Pre-Consumer: 24.8%
Post-Consumer: 0.0%
Manufacturing Plant: Lewisport, KY

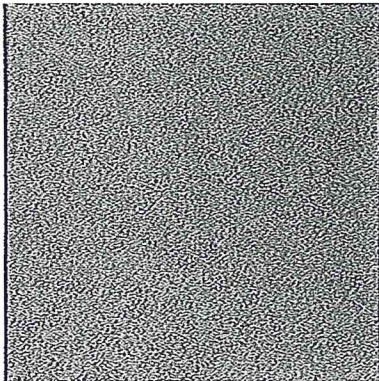

ARID FLASH (2) 0Q48
Field Tile
Pre-Consumer: 24.8%
Post-Consumer: 0.0%
Manufacturing Plant: Lewisport, KY

Description

These unglazed quarry tiles are naturally stain- and slip-resistant, and are available with an abrasive grain for even greater traction.

Notes:

- Numbers in () indicate price group. No. (1) is the least expensive.

Product Information

Tile Thickness:
1/2"
Relative Pricing:
Low
Minimum
Grout Joint
Recommendation:

3/8"

Shade Variation:
Medium (V2)

Technical Data

	D.C.O.F.	Moisture	Breaking		Chemical	Abrasion
	Wet	Absorption	Strength	MOH's	Resistance	Resistance
Non-Abrasive	≥ 0.42	<3.0%	>350 lbs	7	Resistant	N/A
Abrasive	≥ 0.42	<3.0%	>350 lbs	7	N/A	N/A

Dynamic C.O.F. (Wet) value as measured by the DCOF AcuTest™ helps to assess a products suitability for a commercial environment. [Read information on D.C.O.F.](#)

Applications

Floor Applications

	Target DCOF wet	Suitable
Dry & Level - Interior	n/a	✓
Wet & Level - Interior	≥ 0.42	✓
Commercial Dining Areas	≥ 0.50	✓
Exterior Applications; Pool Decking & Other Wet Areas with Minimal Footwear	≥ 0.60	✓ *
Covered Exterior	≥ 0.60	✓ *
Subject to Oils	≥ 0.60	✓
Ramps & Inclines	≥ 0.65	

Other Applications

Suitable

Notes:

- Suitable for exterior floors and walls in freezing and non-freezing climates when proper installation methods are followed.
- We do not recommend light colored quarry tile in commercial kitchens unless properly sealed. It is necessary to follow the proper procedures and recommendations from the grout and maintenance products manufacturers.
- Suitable for use on exterior patios, including pool decks and ramps when ordered with abrasive.
- *Abrasive surface only

Downloads/Links

DOWNLOADS



- [Sales Sheet](#)
- [Download Quarry Tile SDS MSDS](#)
- [BIM Objects](#)

LINKS

- [DCOF AcuTest™](#)
- [Factors To Consider](#)
- [Installation Considerations](#)
- [Care & Maintenance](#)
- [Warranty](#)

- [Porcelain/Ceramic Test Results](#)
- [Locate Us](#)














Tile Size

Size		Shape
4 x 8 Field Tile	(10.2 cm x 20.3 cm) Pieces Per Carton: 50 SQFT: 10.76 (0Q40, 0Q41 only.)	
6 x 6 Field Tile	(15.2 cm x 15.2 cm) Pieces Per Carton: 44 SQFT: 11.00	

Notes:

- All colors are available in abrasive grain 6" x 6".
- Only 0Q40 and 0Q41 are available in abrasive grain in 4" x 8".

Trim

Description		Shape Number	Size	Shape
Bullnose		Q-1485	4 x 8	
Bullnose		Q-1665	6 x 6	
Bullnose Corner		QCRL-1485	4 x 8	
Bullnose Corner		QCRL-1665	6 x 6	
Cove		Q-3565	5 x 6	
Cove Corner		QCRL-3565	5 x 6	
Inside Cove Corner		QB-3565	1 x 5	
Cove Corner		QC-3565	1 x 5	

Notes:

- Floor bullnose trim is intended to coordinate with floor tile in the standard 90-degree installation position.